

FQG30U

FilterQuick® Oil-Conserving Gas Fryer with Touchscreen, Automated Filtration (AF), Optional Oil Quality Sensor and KitchenConnect®

Models

- 2FQG30U



2FQG30U
Shown with optional Basket Lifts

- 40% less oil; 10% less energy
- FilterQuick® automated filtration
- FQ4000 Touchscreen Controller
- Optional Oil Quality Sensor
- KitchenConnect® communication capability

Standard Features

- 30-lb. (15-liter) frypot with open-pot design requires 40% less oil to cook as much food as frypots almost twice its size, while using 10% less energy and producing less waste.
- Frying area 13" x 14" x 3-3/4" (33 x 36 x 9.5 cm) per full frypot
- 70,000 Btu/hr. input (17,632 kcal/hr.) (20.5 kw) per full frypot**
- SMART4U® Technology
 - Oil Attendant® – automatically replenishes oil from Jug-in-box (JIB) conveniently located inside the fryer cabinet.
 - FQ4000 Touchscreen controller has operation management features that monitor and help control food and oil quality, oil life, and equipment performance.
 - Fingertip, closed cabinet, automated filtration with rear oil flush, puts filtration where it's most convenient to operate, right on the front of the fryer.
 - KitchenConnect® communication capability
- Innovative safety features offer proprietary advantages over other fryers--prevent simultaneous vat filtrations
- Independent frypot construction of batteries makes it easy to repair or replace a frypot while maintaining continuous operation.
- Durable, infrared burners.
- Center-mounted RTD, 1° action thermostat
- Stainless steel frypot, door, and cabinet sides
- Adjustable casters
- Mobile Jib
- Gas connection -- see chart on back
- Bottom splash shield
- Frypot covers
- Sediment trays
- One side splash shield
- TB Quick reference card
- One 1" x 48" swivelmax disconnect
- 3 sample filter paper packs
- Anchor strap and chain restraint kit

Options and Accessories

- Basket lifts
- Oil Disposal Caddy (ODC35)
- Oil Quality Sensor

Specifications

Frymaster's FQG30U gas fryers are the ultimate oil-conserving, high-performance fryers. As operators are pressured to do more with less, the FQG30U gas fryers help improve profit margins with labor and energy-saving features, contribute to green and sustainability initiatives, safeguard workers, and move toward healthier eating.

The open stainless steel frypot is easy to clean. These fryers reduce operating costs by using less oil, 30-lbs versus 50-lbs. Oil life is maximized with auto top-off (ATO) because the smaller frypot maintains a favorable ratio of fresh to used oil. Less oil to fill and longer times between fills saves operators well over 40% on their oil costs. The optional integrated Oil Quality Sensor monitors the health of the oil, indicating with great precision the true point that oil needs to be discarded. This ensures high food quality and optimal oil life.

The FQ4000 Touchscreen controller has a recipe library that accommodates product images and can be loaded via the fryer's USB port. It has variable product display options and the ability to organize recipes into Day Part menus. The controller has intuitive functions, requiring minimal training to operate.

The COOL Mode feature reduces the temperature when the fryer is not in use and saves energy.

The easy-to-use, closed cabinet automated filtration (AF) system encourages more frequent filtering, which preserves oil life and ensures consistent, great-tasting food. The AF is operated with fingertip ease from the front of the fryer. No doors to open.

The frypot is air cooled during filtration. This reduces the heat load on the oil so it lasts longer. Only one frypot filters at a time. Other frypots are held in queue, reducing risk of oil spills and worker injury.

Flexible filter reminders are set by individual product count. The percentage of cooks remaining before a filter prompting can be checked at any time with a simple push of the filter button.

**CE Gas Specifications:

- Gas 20 & Gas 25 = 70,990 Btu/hr. input (17,882 kcal/hr.) (20.8 kw) per full frypot;
- Gas 31 = 68,260 Btu/hr. (17,194 kcal) (20 kw) per full frypot


*Liter conversions are for liquid shortening @ 70° F.



Meets CE food contact requirements.

Approved for Australia

Approved for Korea

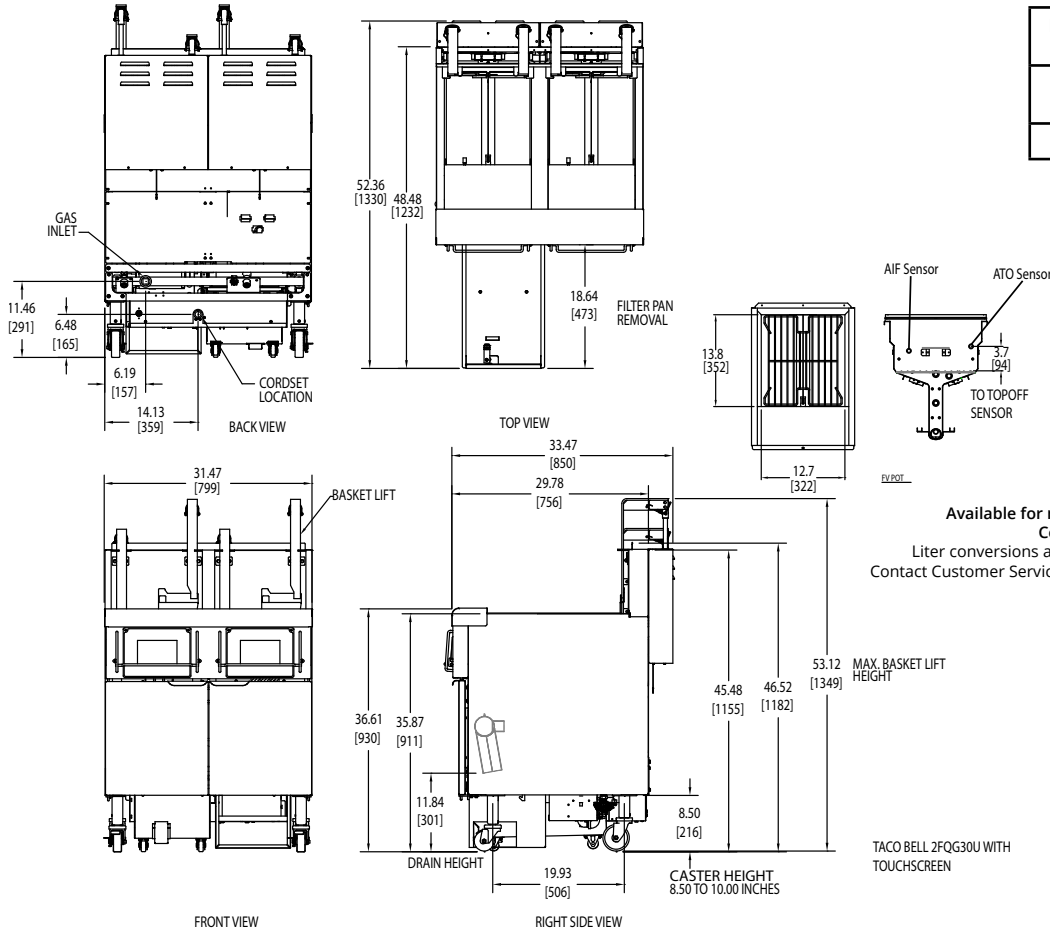

FQG30U Gas Connection Requirements	
No. of Fryers	Gas Connection Size (NPT)
2	One 1"

Available for natural gas and propane gases. Consult factory for other gasses. Liter conversions are for liquid shortening @ 70° F. Contact Customer Service at 1-800-221-4583 inside USA; +1=318-865-1711 outside USA.

DIMENSIONS

MODEL NO.	OIL CAPACITY	OVERALL SIZE (cm)			NET WEIGHT	*APPROXIMATE SHIPPING INFORMATION				
		WIDTH	DEPTH	HEIGHT		WEIGHT	CLASS	CU. FT.	DIMENSIONS (cm)	
2FQG30U	30 lbs. (15 liters)	31-1/2" (80)	29-7/8" (76)	46-1/2" (118)	500 lbs. (227 kg)	77.5	51	W 38" (97)	D 44" (111.8)	H 53" (134.6)
2FQG30U with basket lifts			33-1/2" (85)	53-1/8" (135)	600 lbs. (272 kg)					

*Information is APPROXIMATE and may vary at time of shipment due to options/add-ons per customer request.

POWER REQUIREMENTS

MODEL NO.	BASIC DOMESTIC & EXPORT			OPTIONS DOMESTIC & EXPORT
	CONTROLS/FRYPOT	FILTER	AUTO TOP OFF/FRYPOT	BASKET LIFTS/FRYPOT
FQG30U	120V 1 A	120V 8 A	120V 1 A	120V 3 A
	220V 1 A	220V 5 A	220V 1 A	220V 2 A
	240V 1 A	240V 5 A	240V 1 A	240V 2 A
	250V 1 A	250V 5 A	250V 1 A	250V 2 A
MODEL NO.	BASIC CE			OPTIONS CE
	CONTROLS/FRYPOT	FILTER	AUTO TOP OFF/FRYPOT	BASKET LIFTS/FRYPOT
FQG30U	230V 1 A	230V 5 A	230V 1 A	230V 2 A

NOTES

- 5 ft. (1.5 m) grounded cord set provided on Domestic fryers.
- 8 ft. 10" (2.7 m) grounded cord set provided on Export/CE fryers.
- 1-1/2" (3.8 cm) kitchen main manifold gas supply line required. Gas inlet size (I.D.) should be no smaller than that provided for connection to the fryers. See service manual and/or plumbing codes for proper pipe sizing. Check plumbing codes for proper supply line sizing to support Btu/hr. rating.

CLEARANCE INFORMATION

- A minimum of 24" (61.0 cm) should be provided at the front of the unit for servicing and proper operation, and 6" (15.2 cm) between the sides and rear of the fryer to any combustible material.

HOW TO SPECIFY

FQG30U High-efficiency, oil-conserving, 30-lb. open frypot gas fryer with Auto Top-Off, FQ4000 Touchscreen controller, Automated Filtration, optional oil quality sensor, KitchenConnect, casters and stainless steel frypot, door, and cabinet sides.

MODEL NO. EXPLANATION: #FQG30UACQTHIJ

#	= # of vats	A	= # Split Vats: 0	H	= Spreader
FQ	= FilterQuick	C	= Location of splits:	I	= Basket lifts
G	= Fuel Type: Gas	Q	= Automated	JJ	= Fuel Type: NG, PG, BU
30	= 30 lbs.		= Filtration with ATO		
U	= Vat Type: Open	T	= Touchscreen Controller		

8700 Line Avenue
 Shreveport, LA 71106-6800
 USA

Tel: 318-865-1711
 Tel: 1-800-221-4583
 Fax: 318-868-5987
 E-mail: info@frymaster.com

www.frymaster.com
 Bulletin No. 6324
 Revised 9/22/17
 Litho in U.S.A. ©Frymaster, LLC

